



## RE352 DSC-Compatible PINpad™

### Features

- Secure, 4-digit Code to disarm
- 1-button arming
- Red/Green LED arming feedback
- Small, yet comfortable keypad
- Mounts on wall via VHB® tape, or screws
- Secure for carrying in purse or mounting on car visor
- Strong, reliable RF signal.
- 4-6 year battery life on CR2032 battery.

### Key Instructions

#### • Enroll as a Key Fob.

##### • Code programming

Default access code is "1234".

To change access code:

1. Enter current 4-digit access code.
2. Within 4 seconds, press and hold the "1" and "3" keys simultaneously. After 3 seconds, Red LED will be lit.
3. Enter new 4-digit access code. After successfully changing the code, the Green LED will be lit
4. Note new access code . BAD GUY CANNOT RESET CODE. So it must be noted and remembered!

##### • Enrolling:

1. Refer to the DSC control unit installation manual.
2. If panel is capable of Wireless Enrollment Mode, put the control panel in that mode and both the STAY or AWAY buttons for 3 seconds.  
Or, put panel in Serial Number Entry Mode and program in the printed ESN.
3. Set up as you would a WS4939 4-Button Fob.

### Operation

PINpad Button	Panel Action	LED
Stay	ARM STAY	flashes double red
Away	ARM AWAY	flashes double red twice
PIN Code	DISARM	flashes double green
Stay + Away	PANIC ALARM	flashes red 8 times



### Pictures


Red/Green Status LED Shows command sent

TO CHANGE PIN CODE:  
Current 4-digit access code, and then...  
1 + 3 → Red LED, and then...  
Enter New Code




Stay + Away  
=  
Panic (Enroll)

### Battery Replacement



Insert Screwdriver here to open

CR2032 Battery + Terminal up

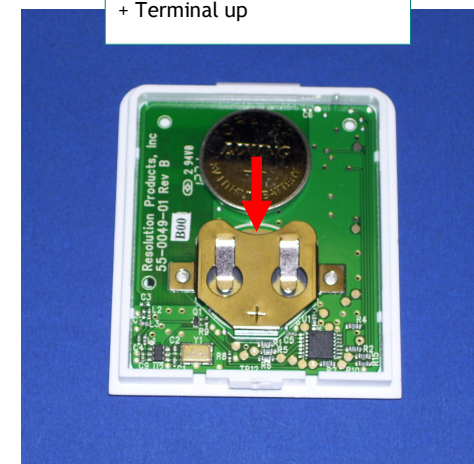

## Specifications

Secure replacement to a DSC WS4939 4-Button Key Fob.

Not supervised.

Replacement Battery: CR2032 Lithium / Manganese Dioxide

Temperature Range: 0F to 120F

Housing dimensions: 2x2.25x0.33 inches

1-way RF: Does not receive panel status

Specifications subject to change without notice.

## Notices

“GE”, “Honeywell”, “DSC”, “2GIG” and “Napco” are trademarks owned by General Electric Company, Honeywell International Inc., Tyco Safety Products Canada LTD, 2GIG Technologies Inc., and NAPCO Security Systems, Inc., respectively.

Resolution Products, Inc. products will function with one of either GE, Honeywell, DSC or Napco systems. However, no Resolution product is produced by, endorsed by, nor is officially associated with GE, Honeywell, DSC or Napco. Resolution recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

### Warranty

Resolution Products, Inc. will replace products that are defective in their first five (5) years.

### FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

This device may not cause harmful interference.

This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE352

### IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE352